


MGFS6

MGF S 6 24 05 -□

① ② ③ ④ ⑤ ⑥

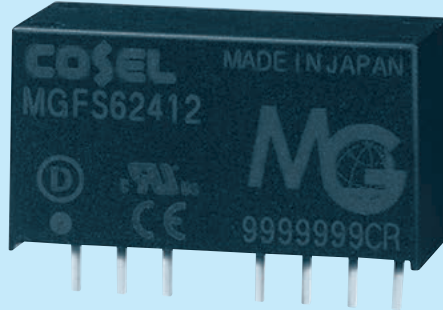

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Input voltage
- ⑤ Output voltage
- ⑥ Optional
- Y2: Output voltage adjustable (+10%, -5%)

MODEL	MGFS6243R3	MGFS62405	MGFS62412	MGFS62415
MAX OUTPUT WATTAGE[W]	5.28	6.0	6.0	6.0
DC OUTPUT	VOLTAGE[V]	3.3	5	12
	CURRENT[A]	1.6	1.2	0.5

SPECIFICATIONS

	MODEL	MGFS6243R3	MGFS62405	MGFS62412	MGFS62415
INPUT	VOLTAGE[V]	DC9 - 36 (Surge voltage 50V,100ms max)			
	CURRENT[A]	*1 0.28typ	0.30typ	0.29typ	0.29typ
	EFFICIENCY[%]	*1 80typ	84typ	88typ	88typ
OUTPUT	VOLTAGE[V]	3.3	5	12	15
	CURRENT[A]	1.6	1.2	0.5	0.4
	LINE REGULATION[mV]	20max	20max	48max	60max
	LOAD REGULATION[mV]	20max	20max	48max	60max
	RIPPLE[mVp-p]	lo=30% - 75max	75max	100max	100max
		*2 lo=0 - 30% 225max	225max	300max	300max
	RIPPLE NOISE[mVp-p]	lo=30% - 120max	120max	150max	150max
		*2 lo=0 - 30% 300max	300max	400max	400max
	TEMPERATURE REGULATION[mV]	-20 to +65°C 50max	50max	150max	180max
		-40 to +65°C 80max	80max	240max	290max
	DRIFT[mV]	*3 20max	20max	48max	60max
PROTECTION CIRCUIT AND OTHERS	START-UP TIME[ms]	30max (Minimum input, lo=100%)			
	OUTPUT VOLTAGE SETTING[V]	3.21 - 3.42	4.90 - 5.21	11.64 - 12.36	14.55 - 15.45
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
	REMOTE ON/OFF	Provided (Negative logic L : ON, H : OFF)			

MODEL	MGFS6483R3	MGFS64805	MGFS64812	MGFS64815
MAX OUTPUT WATTAGE[W]	5.28	6.0	6.0	6.0
DC OUTPUT	VOLTAGE[V]	3.3	5	12
	CURRENT[A]	1.6	1.2	0.5

SPECIFICATIONS

	MODEL	MGFS6483R3	MGFS64805	MGFS64812	MGFS64815
INPUT	VOLTAGE[V]	DC18 - 76 (Surge voltage 100V, 100ms max)			
	CURRENT[A]	*1 0.14typ	0.15typ	0.15typ	0.15typ
	EFFICIENCY[%]	*1 80typ	84typ	88typ	88typ
OUTPUT	VOLTAGE[V]	3.3	5	12	15
	CURRENT[A]	1.6	1.2	0.5	0.4
	LINE REGULATION[mV]	20max	20max	48max	60max
	LOAD REGULATION[mV]	20max	20max	48max	60max
	RIPPLE[mVp-p]	lo=30% - 75max	75max	100max	100max
		*2 lo=0 - 30% 225max	225max	300max	300max
	RIPPLE NOISE[mVp-p]	lo=30% - 120max	120max	150max	150max
		*2 lo=0 - 30% 300max	300max	400max	400max
	TEMPERATURE REGULATION[mV]	-20 to +65°C 50max	50max	150max	180max
		-40 to +65°C 80max	80max	240max	290max
	DRIFT[mV]	*3 20max	20max	48max	60max
PROTECTION CIRCUIT AND OTHERS	START-UP TIME[ms]	30max (Minimum input, lo=100%)			
	OUTPUT VOLTAGE SETTING[V]	3.21 - 3.42	4.90 - 5.21	11.64 - 12.36	14.55 - 15.45
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
	REMOTE ON/OFF	Provided (Negative logic L : ON, H : OFF)			

GENERAL SPECIFICATIONS

ISOLATION	INPUT-OUTPUT	DC1,500V or AC1,000V 1minute, Cutoff current=10mA, DC500V 1,000M Ω min (20 $\pm$ 15°C)
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-40 to +85°C, 20 to 95%RH (Non condensing) (Required derating), 5,000m (16,400feet) max
	STORAGE TEMP., HUMID. AND ALTITUDE	-40 to +100°C, 20 to 95%RH (Non condensing), 9,000m (30,000feet) max
	VIBRATION	10 - 55Hz 98.0m/s ² (10G), 3minute period, 60minutes each along X, Y and Z axis
	IMPACT	490.3m/s ² (50G) 11ms, once each along X, Y and Z axis
SAFETY	AGENCY APPROVALS	UL60950-1, C-UL, EN60950-1
OTHERS	CASE SIZE/WEIGHT	22.0 $\times$ 12.0 $\times$ 9.5mm [0.87 $\times$ 0.48 $\times$ 0.38 inches] (W $\times$ H $\times$ D) / 7g max
	COOLING METHOD	Convection/Forced air

- *1 Rated input 24V or 48V DC Io=100%
- *2 Ripple and ripple noise is measured by using test board with ceramic capacitor 1 μ F at 50mm from output pins.
- *3 Drift is the DC output accuracy for eight hours period after a half-hour warm-up at 25°C.
- * Parallel operation with other model is not possible.
- * MGF6xx12/MGF6xx15 is available as single output, +24V/+30V

External view

